

51.2v 50ah Lithium Battery Rack Mount For Network Backup Power

Basic Information

Place of Origin: ChinaBrand Name: XWELL

• Certification: UN38.3,MSDS,UL,CB,BIS,PSE,GB4943.1

safety standard, CE, FCC, ROHS, battery

UN38.3, MSDS, UL, CB, BIS, PSE

Model Number: XW-2560W-1

Minimum Order Quantity: 1 pcsPackaging Details: Carton

Delivery Time: 7-10 working days

• Payment Terms: L/C, D/A, D/P, T/T, Western Union,

MoneyGram

Supply Ability: 5000 pcs per month



Product Specification

Nominal Voltage: 51.2V
Energy Capacity: 5.12kwh
Discharge Current: 50A

Cell Type: LiFePO4 Prismatic

Standard Charge Voltage: 54.6V
Max Charge Current: 50A
Discharge Cut-off Voltage: 42.5V
Display: LCD Optional

Communication Interface: RS485, RS232, CAN
 Cycle Life: >6000 Cycles(80%DOD)

Highlight: 50ah Lithium Battery Rack Mount,

51.2v Lithium Battery Rack Mount

Product Description

Lithium Battery 51.2v 50ah 100ah 200ah Rackmount Lithium Battery Lithium-Ion Battery Network Backup Power

Advantages of Rackmount Lithium Battery

- 1. Reliable Automotive Grade lithiumiron Phosphate Battery, Higher energy density Stable performance & greater power
- 2. Match Multiple Brands Inverter, Simultaneous communication & docking with multiple brands inverter
- 3. Long Cycle Life 6000-8000 times, 10-15YRS service time
- 4. Low Resistance & High Current, Low self-discharge rate & Efficient charging
- 5. Intelligent BMS Battery Protection, Effectively avoiding overcharge Overdischarge, Overcurrent, Short-circuit
- 6. Good Safety Performance, 100% safe, Extreme safety test

Application of Rackmount Lithium Battery

- 1. Off-grid Solar ESS
- 2. Marine /Yatch
- 3. Night Fishing Power
- 4. RV/ Camper Power
- 5. Camping Power Supply
- 6. Solar Street Light


Features of Rackmount Lithium Battery

Easy installation Light weight Compact size

Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah		
Nominal voltage	51.2V				
Nominal capacity (kwh)	2.56	5.12	10.24		
Cell type	LiFePO4				
Standard charge voltage	54.6V(adjustable)				
Max charge current	50A				
Discharge cut-off voltage	42.5V(adjustable)				
Max discharge current	50A				
Display	LCD(Optional)				
Communication interface	CAN/RS485/RS232				
Cycle life	>6000 Cycles (80%DOD)				
Charge temperature range	0~45°C				
Discharge temperature range	-20~60°C				
Color	Black				
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U		
Weight	About 35Kg	About 42Kg	About 84Kg		
Installation method	Rack Mount				

Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
А	Height	119±1.0 mm
В	Width	160±1.0 mm
С	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm

Operation Pannel of Rackmount Lithium Battery

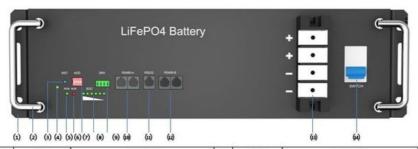


#	Item	Function	#	Item	Function
(1)	Case Hanger	mount in 19 inch cabinet or anti-seismic rake	(8)	SOC Indicator	indicate battery capacity percentage
(2)	Handle	easy to handle, move and install	(9)	Dry Contact	remote on/off control by signal wires
(3)	Reset Switch	restart and wake up the battery	(10)	Comm. Port	RS485+RS232
(4)	On/Off Indicator	turn on/off green and indicate battery on/off	(11)	Comm. Port	RS232
(5)	Working Indicator	turn on green and indicate normal operation	(12)	Comm. Port	RS485+RS232
(6)	Alarm Indicator	turn on red when there is alarm or failure	(13)	Terminal Bar	charge and discharge terminal
(7)	DIP Switch	define battery IP for parallel connection	(14)	DC Switch	turn battery on/off

Size of Rackmount Lithium Battery

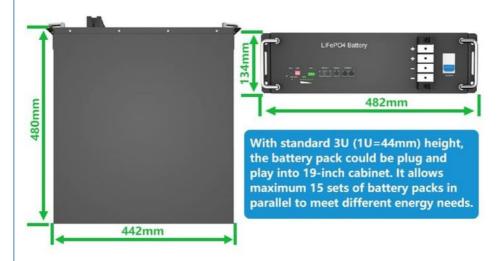

Structure of Rackmount Lithium Battery



#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shel
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	1
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	1

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

Our services

- 1. Your inquiry related to our products price will be replied in 24 hours.
- 2. Experienced staffs to answer all your enquiries in fluent English
- 3. We make the OEM and ODM service for more than 5 years
- 4. Protection of your sales area, ideas of design and all your private information.
- 5. No matter big order or small order, we will provide all the best quality, best service.6. If our products have any problem that we caused, they will be sent free in the next order.



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou,