



Smart Rackmount Lithium Battery, 48v 200ah Lifepo4 Battery For Home Solar **Power System**

Basic Information

. Place of Origin: China Brand Name: **XWELL**

· Certification: UN38.3,MSDS,UL,CB,BIS,PSE,GB4943.1

safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE

Model Number: XW-1024W-1

Minimum Order Quantity: 1 pcs Packaging Details: Carton

. Delivery Time: 7-10 working days

• Payment Terms: L/C, D/A, D/P, T/T, Western Union,

MoneyGram

. Supply Ability: 5000 pcs per month



Product Specification

. Nominal Voltage: 48 Volts

 Nominal Capacity: 200 Amper Hour

. Nominal Energy: 10240wh

. Cell Type: LiFePO4 Prismatic Battery

• Discharge Current: 50A • Max Charge Current: 50A Discharge Cut-off Voltage: . Display: LCD Optional

• Communication Interface: RS485, RS232, CAN Cycle Life:

. Highlight: 48v Rackmount Lithium Battery,

Rackmount Lithium Battery 200ah, Home 48v 200ah Lifepo4 Battery

>6000 Cycles(80%DOD)

Product Description

48v 200ah Lifepo4 Server Rack Starter Rackmount Lithium Battery Pack For Smart Bms Solar Power System Home

Secure your energy independence

Xwell residential Energy Storage Systems (ESS) is a crucial component to improving energy resilience and reduce energy costs for homeowners.

Our smart efficient high voltage energy storage modules can be deployed with a wide range of industry standard inverters and power control.

More Reliable

- * Advanced LiFePO4 technology
- * Smart battery managment system
- * High quality facility with TS16949

More Flexible

- * Modular structure, easier expansion
- * Easy transportation, fast installation

Intelligent BMS

- * Battery monitoring & protection
- * Short circuit protection
- * Wireless communication via APP


Comprehensive Service

- * 10 years global limitted warranties
- * One stop service

Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah		
Nominal voltage	51.2V				
Nominal capacity (kwh)	2.56	5.12	10.24		
Cell type	LiFePO4				
Standard charge voltage		54.6V(adjustable)			
Max charge current	50A				
Discharge cut-off voltage	42.5V(adjustable)				
Max discharge current	50A				
Display	LCD(Optional)				
Communication interface	CAN/RS485/RS232				
Cycle life	>6000 Cycles (80%DOD)				
Charge temperature range	0~45°C				
Discharge temperature range	-20~60°C				
Color	Black				
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U		
Weight	About 35Kg	About 42Kg	About 84Kg		
Installation method	Rack Mount				

Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
В	Width	160±1.0 mm
С	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm

Operation Pannel of Rackmount Lithium Battery

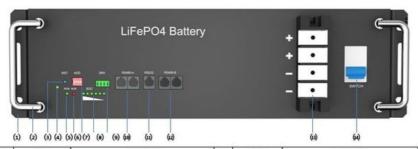


#	Item	Function	#	Item	Function
(1)	Case Hanger	mount in 19 inch cabinet or anti-seismic rake	(8)	SOC Indicator	indicate battery capacity percentage
(2)	Handle	easy to handle, move and install	(9)	Dry Contact	remote on/off control by signal wires
(3)	Reset Switch	restart and wake up the battery	(10)	Comm. Port	RS485+RS232
(4)	On/Off Indicator	turn on/off green and indicate battery on/off	(11)	Comm. Port	RS232
(5)	Working Indicator	turn on green and indicate normal operation	(12)	Comm. Port	RS485+RS232
(6)	Alarm Indicator	turn on red when there is alarm or failure	(13)	Terminal Bar	charge and discharge terminal
(7)	DIP Switch	define battery IP for parallel connection	(14)	DC Switch	turn battery on/off

Size of Rackmount Lithium Battery

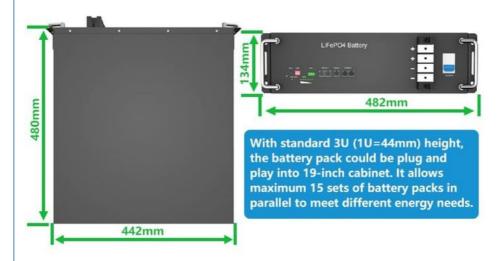

Structure of Rackmount Lithium Battery



#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shel
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	1
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	1

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

Why choose us?

We production of battery products are widely used in communications, power, financial systems, uninterruptible power supply systems (UPS), power plant and substation switch control, solar panels, controllers inverter etc solar systems, emergency lighting, alarm systems, cars, ships, motorcycles, electric bicycles and other industries. Sales network covers all provinces, municipalities, autonomous regions and established offices in various places and after-sales service center. Our team with Yuasa ,BYD battery senior consultant,High quality technical management team, advanced production and testing equipment to ensure the quality of the battery is reliable.



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou,