



Rechargeable 24V 100Ah Rack Mount Battery 2.5Kwh LiFePO4 Lithium Ion Batteries For Solar Energy System

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-5120W-1
- Minimum Order Quantity: 1 pcs
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



Product Specification

- Place Of Origin: Guangdong, China
- Battery Type: Lifepo4/lithium Battery
- Pack Capacity: 50Ah 100Ah 200Ah
- Pack Energy: 2.56Kwh 5.12Kwh 10.24Kwh (Optional)
- Discharge Current: 50A
- Max Charge Current: 50A
- Discharge Cut-off Voltage: 42.5V
- Display: LCD Optional
- Communication Interface: RS485, RS232, CAN
- Cycle Life: >6000 Cycles(80%DOD)
- Highlight: **LiFePO4 Rack Mount Battery,
2.5Kwh Rack Mount Battery,
24V 100Ah Rack Mount Battery**

for more products please visit us on esslithiumbattery.com

Product Description


Rechargeable 24V 100Ah Rack Mount Battery 2.5Kwh LiFePO4 Lithium Ion Batteries For Solar Energy System

1. Little and small in weight
2. Environmental protection and pollution-free products, without heavy metal green and safeguard the environment.
3. The typical cycle life is more than 6500 times

Rackmount Lithium Battery Specification


| | | | |
|-----------------------------|-----------------------|-------------------|-------------------|
| Model | 51.2V50Ah | 51.2V100Ah | 51.2V200Ah |
| Nominal voltage | 51.2V | | |
| Nominal capacity (kwh) | 2.56 | 5.12 | 10.24 |
| Cell type | LiFePO4 | | |
| Standard charge voltage | 54.6V(adjustable) | | |
| Max charge current | 50A | | |
| Discharge cut-off voltage | 42.5V(adjustable) | | |
| Max discharge current | 50A | | |
| Display | LCD(Optional) | | |
| Communication interface | CAN/RS485/RS232 | | |
| Cycle life | >6000 Cycles (80%DOD) | | |
| Charge temperature range | 0~45°C | | |
| Discharge temperature range | -20~60°C | | |
| Color | Black | | |
| Dimension (mm) | 442x410x133 3U | 442x410x177 4U | 550x442x220 5U |
| Weight | About 35Kg | About 42Kg | About 84Kg |
| Installation method | Rack Mount | | |

Cell Specification of Rackmount Lithium Battery




| # | Item | Parameter |
|---|---------------|------------|
| A | Height | 119±1.0 mm |
| B | Width | 160±1.0 mm |
| C | Thickness | ≤ 50 mm |
| D | Tabs Distance | 97±0.5 mm |

Operation Panel of Rackmount Lithium Battery

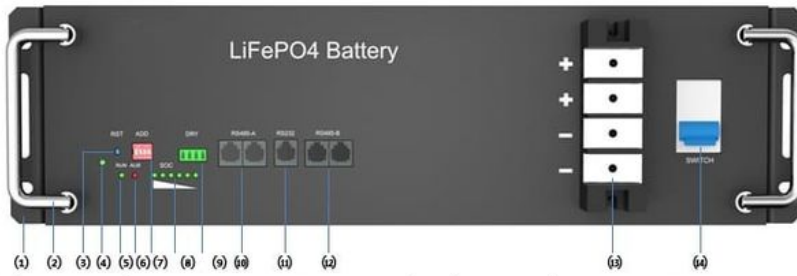


| # | Item | Function | # | Item | Function |
|-----|-------------------|---|------|---------------|---------------------------------------|
| (1) | Case Hanger | mount in 19 inch cabinet or anti-seismic rake | (8) | SOC Indicator | Indicate battery capacity percentage |
| (2) | Handle | easy to handle, move and install | (9) | Dry Contact | remote on/off control by signal wires |
| (3) | Reset Switch | restart and wake up the battery | (10) | Comm. Port | RS485+RS232 |
| (4) | On/Off Indicator | turn on/off green and indicate battery on/off | (11) | Comm. Port | RS232 |
| (5) | Working Indicator | turn on green and indicate normal operation | (12) | Comm. Port | RS485+RS232 |
| (6) | Alarm Indicator | turn on red when there is alarm or failure | (13) | Terminal Bar | charge and discharge terminal |
| (7) | DIP Switch | define battery IP for parallel connection | (14) | DC Switch | turn battery on/off |

Size of Rackmount Lithium Battery

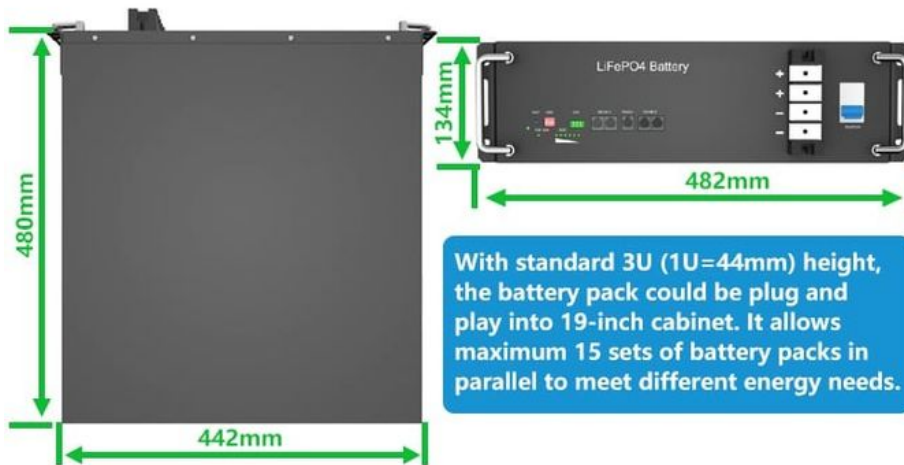

Structure of Rackmount Lithium Battery

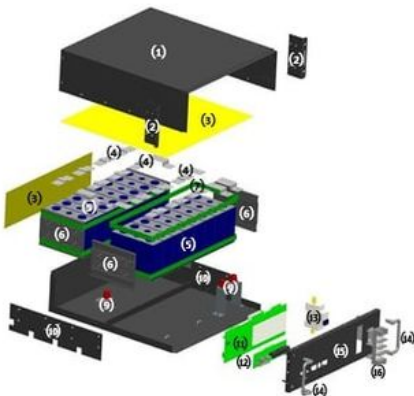

| # | Item | Material |
|------|------------------------------|---------------------|
| (1) | Case Cover | SPCC |
| (2) | Case Hanger | SPCC |
| (3) | Insulation Sheet | Ethoxyline |
| (4) | Bus-Bar | Aluminum Alloy |
| (5) | Battery Cell | LFP, Aluminum Shell |
| (6) | Module Side Plate | ABS / PC |
| (7) | Cell Binding Loop | Plastic Steel |
| (8) | Case Bottom | SPCC |
| (9) | Insulating Wiring Terminal | Bakelite |
| (10) | Side Plate Combination Board | SPCC |
| (11) | BMS | PCB |
| (12) | Commination Board | PCB |
| (13) | DC Switch | / |
| (14) | Handle | Sherardized SPCC |
| (15) | Case Front Cover | SPCC |
| (16) | Terminal Bar (+ & -) | / |

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

What We Offer?

Supply chain solution, strict quality control, real-time response
OEM/ODM Manufacturer, custom sizes and shapes available on request
Suggestion of new design or material, new technology and cost structure
Engineers team at your service
Flexible small orders are acceptable
One-stop supply to eliminating messy links



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.

+86 18620492985

sales@esslithiumbattery.com

esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China