



50kWh High Voltage Rackmount Lifepo4 Energy Storage For Industrial Operations

Basic Information

Place of Origin: ChinaBrand Name: XWELL

• Certification: UN38.3,MSDS,UL,CB,BIS,PSE,GB4943.1

safety standard, CE, FCC, ROHS, battery

UN38.3, MSDS, UL, CB, BIS, PSE

Model Number: XW-1024W-1

Minimum Order Quantity: 1 pcsPrice: USDPackaging Details: Carton

Delivery Time: 7-10 working days

Payment Terms:
 L/C, D/A, D/P, T/T, Western Union,

MoneyGram

Supply Ability: 5000 pcs per month



Product Specification

Apparent Energy(kwh): 51.2kwh
 Rated Voltage: 512V
 Max Charge/discharge Current: 100A

Cell Type: LiFePO4 Prismatic Cell
 Communication Interface: RS485, RS232, CAN

Nominal Volume (kwh: 10.24khwChemistry: Lifepo4

Working Temperature

Range:

Highlight:

Charging 0~55 Discharging -20~55

Industrial Operations Rackmount Lifepo4

Energy Storage

High Voltage Rackmount Lifepo4 Energy

Storage

, 50kWh Rackmount Lifepo4 Energy Storage

Product Description

50kWh High voltage Lifepo4 Rackmount Energy Storage System for Industrial Applications

The 50kWh capacity makes it suitable for a wide range of applications. For example, in commercial and industrial settings, it can be used to store excess energy generated during off-peak hours from renewable sources such as solar panels or wind turbines. This stored energy can then be utilized during peak demand periods, reducing reliance on the grid and potentially lowering energy costs. It can also provide backup power in case of grid failures, ensuring the continuous operation of critical equipment and systems.


Built with high-quality LiFePO4 batteries, it offers a long lifespan, high energy density, and excellent safety features. The rackmount design makes it easy to install and integrate into existing commercial infrastructure. **plications:**

Benefits:

Optimized for large-scale industrial and commercial settings
Efficient high-voltage operation for improved system performance
Modular rackmount design for easy installation and scalability
Reliable and safe LiFePO4 battery technology
Versatile solution for energy storage and grid integration needs
Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah	
Nominal voltage		51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24	
Cell type	LiFePO4			
Standard charge voltage	54.6V(adjustable)			
Max charge current	50A			
Discharge cut-off voltage	42.5V(adjustable)			
Max discharge current	50A			
Display	LCD(Optional)			
Communication interface	CAN/RS485/RS232			
Cycle life	>6000 Cycles (80%DOD)			
Charge temperature range	0~45°C			
Discharge temperature range	-20~60°C			
Color	Black			
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U	
Weight	About 35Kg	About 42Kg	About 84Kg	
Installation method	Rack Mount			

Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
В	Width	160±1.0 mm
С	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm

Operation Pannel of Rackmount Lithium Battery

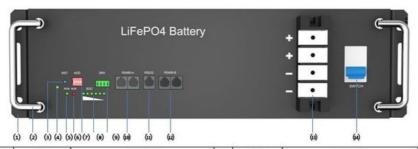


#	Item	Function	#	Item	Function
(1)	Case Hanger	mount in 19 inch cabinet or anti-seismic rake	(8)	SOC Indicator	indicate battery capacity percentage
(2)	Handle	easy to handle, move and install	(9)	Dry Contact	remote on/off control by signal wires
(3)	Reset Switch	restart and wake up the battery	(10)	Comm. Port	RS485+RS232
(4)	On/Off Indicator	turn on/off green and indicate battery on/off	(11)	Comm. Port	RS232
(5)	Working Indicator	turn on green and indicate normal operation	(12)	Comm. Port	RS485+RS232
(6)	Alarm Indicator	turn on red when there is alarm or failure	(13)	Terminal Bar	charge and discharge terminal
(7)	DIP Switch	define battery IP for parallel connection	(14)	DC Switch	turn battery on/off

Size of Rackmount Lithium Battery

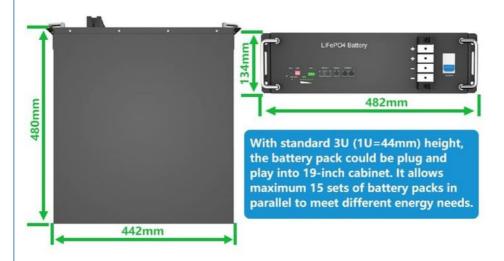

Structure of Rackmount Lithium Battery



#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shel
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	1
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	1

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

Why choose us?

Technical specifications and performance capabilities Safety record and certifications Warranty terms and after-sales support Integration with existing infrastructure Cost-effectiveness and total cost of ownership Company reputation, experience, and financial stability



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China